



Net/X Wireless System with up to 32 Thermostats LAN and WAN Connectivity

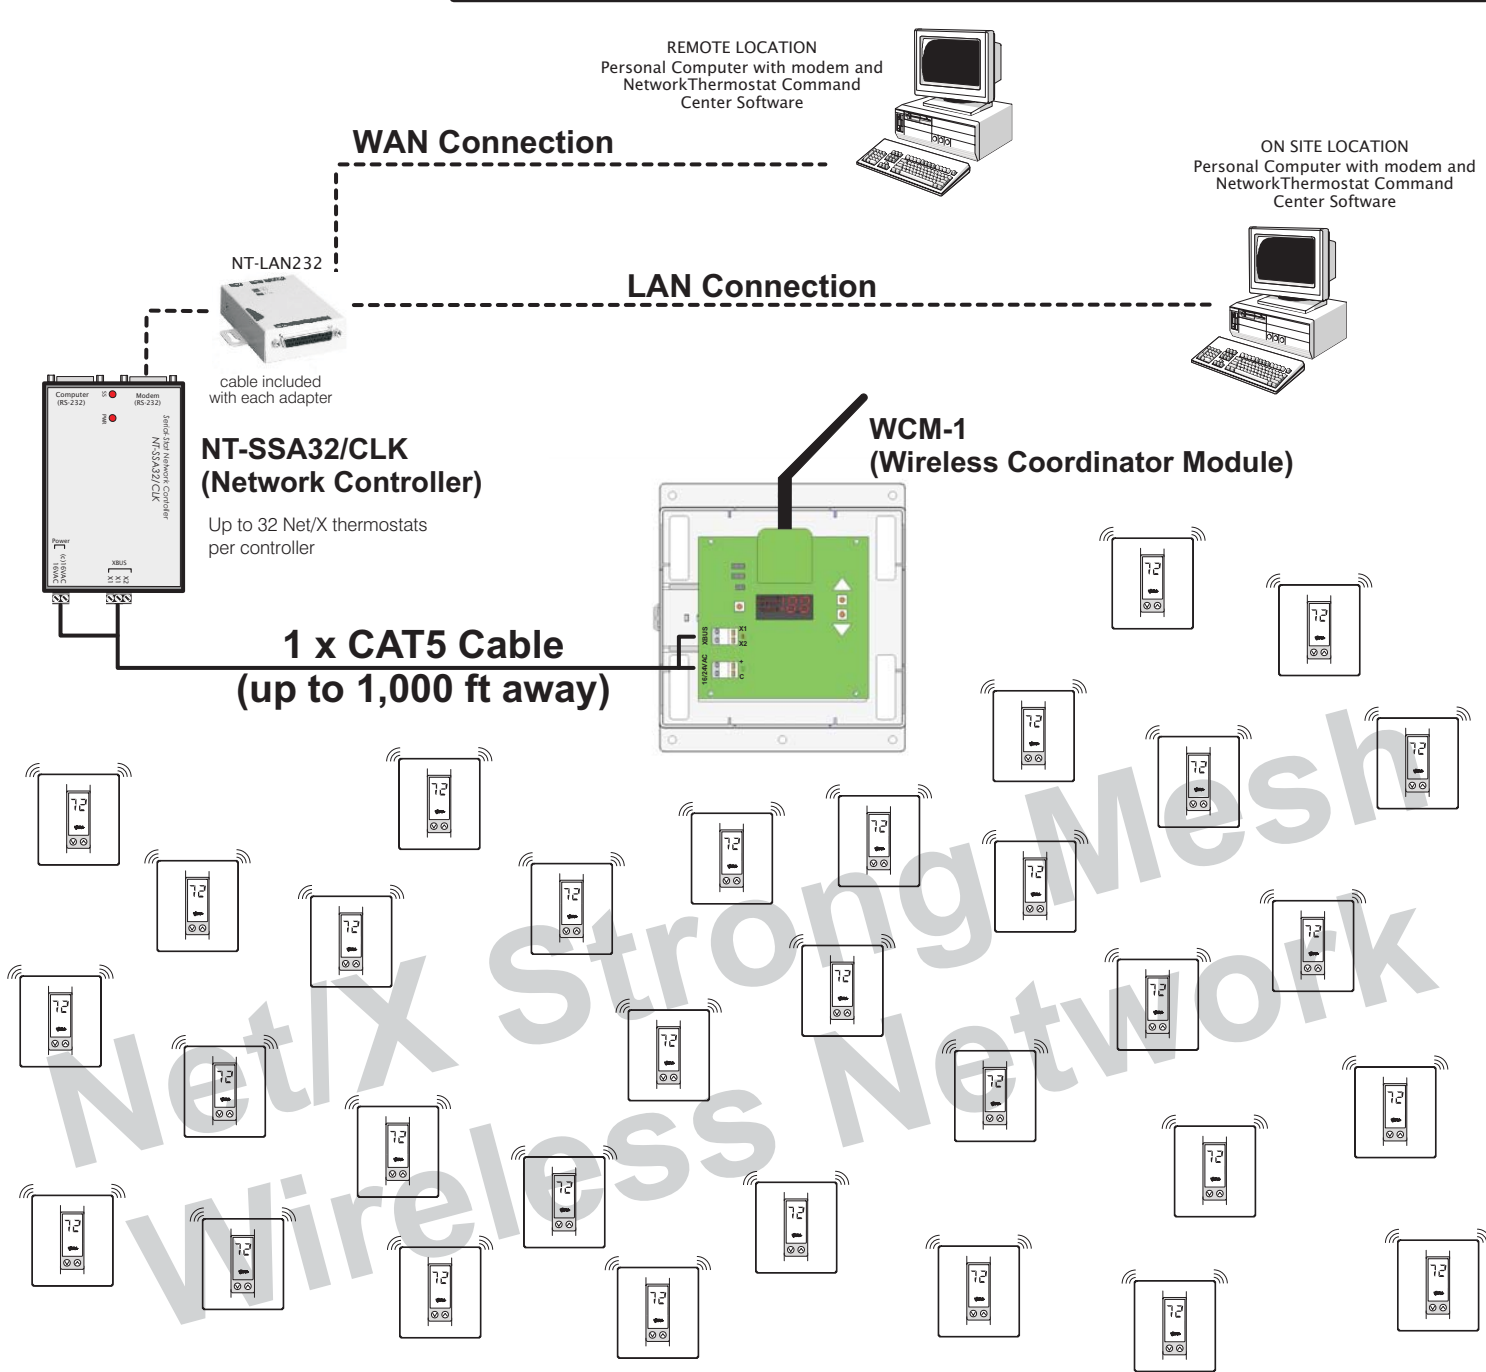

Net/X Thermostat with WBM-1 (Wireless Backplate Module)
32 locations show below

Cable and Wiring Notes
All Net/X products follow industry standard data communications wiring practices. Refer to your local building codes for specific requirements

Wiring Guidelines
A) Place the Network Controller and Ethernet Adapter in the 'IT Room'
B) The WCM-1 can be up to 1,000 feet away from the Network Controller, using 1 CAT5 Cable

Cable Specifications
Net/X communications cable options:
A) Category 5e, 24AWG, 4-pair, or equivalent
B) Category 5e, 24AWG, 4-pair, plenum rated or equivalent

Pair 1 - XBUS Communications Bus
X2 - Blue with White Stripe
X1 - White with Blue Stripe

Pair 2 - Remote Power HOT (TWIST PAIR TOGETHER)
16VAC - Green with White Stripe
16VAC - White with Green Stripe

Pair 3 - Remote Power COMMON (TWIST PAIR TOGETHER)